

Specifications

SMART Response[™] XE interactive response system

Receiver and clicker

Physical specifications

Receiver size 4 5/8" W × 7/8" H × 2 1/8" D

 $(11.9 \text{ cm} \times 2.2 \text{ cm} \times 5.4 \text{ cm})$

Receiver weight 5 3/4 oz. (165 g)

Clicker size 4 5/8" W × 3 9/16" H × 7/8" D

 $(11.9 \text{ cm} \times 9.1 \text{ cm} \times 2.2 \text{ cm})$

Clicker weight 4 1/8 oz. (117 g) with batteries

Shipping size 21 1/4" W × 8 1/4" H × 15 3/4" D

(54 cm × 21.1 cm × 40 cm)

Shipping weight

24-clicker set 13 lb. 7 oz. (6.1 kg)

32-clicker set 15 lb. 14 oz. (7.2 kg)

40-clicker set 18 lb. 12 oz. (8.5 kg)

Standard features

Software SMART Response™ 2013 assessment software, which includes SMART Notebook™

collaborative learning software for Windows® and Mac computers, is included on the DVD.

Software upgrades are available at smarttech.com/downloads.

Technology IEEE 802.15.4 wireless

Radio frequency 2400 MHz to 2483.5 MHz ISM band

Capacity Supports up to 100 clickers with SMART Response XE receiver

SPECIFICATIONS

SMART Response XE interactive response system - Receiver and clicker

SMART Response software computer requirements

Windows operating systems

- Pentium® 4 or later processor
- 2 GB of RAM
- 2.5 GB of free hard disk space (an additional 600 MB is required for complete Gallery installation)
- Windows XP SP3, Windows 7 SP1 or Windows 8 operating system
- Microsoft® .NET Framework 4 Client Profile for SMART Notebook software and SMART Ink™
- Microsoft Visual Studio® 2010 Tools for Office for SMART Ink
- Internet Explorer® Internet browser 8 or later
- Adobe® Flash® Player 11.6 or later Firefox® plug-in for SMART Notebook software and SMART Response software
- Adobe Flash Player 11.6 or later ActiveX® control for SMART Notebook software
- Adobe Reader® 8 or later
- Microsoft DirectX® technology 9 or later for SMART Notebook software

Mac OS X operating system software

- 1.5 GHz Intel® or later processor
- 2 GB of RAM
- 2 GB of free hard disk space (an additional 600 MB is required for complete Gallery installation)
- Mac OS X 10.6 to 10.8 operating system software
- Adobe Reader 8 or later
- · Safari application program 4.0.2 or later
- Adobe Flash Player 11.6 or later plug-in for SMART Notebook software and SMART Response software

Receiver features

Transmit power 3 dBm with a typical range of 100' (30 m)

Antenna Integrated antenna

Host interface USB 2.0 full-speed (12 Mbps) with a 6' (1.8 m) captive cable

LED indicators Multicolored LEDs indicate power, transmit data, receive data and link status.

SPECIFICATIONS

SMART Response XE interactive response system – Receiver and clicker

Configuration Plug and play (SMART Response software required)

Clicker features

Transmit power 3 dBm with a typical range of 100' (30 m)

Antenna Integrated antenna

LCD display 1 1/16" H × 2 9/16" W (27.2 mm × 65.3 mm), 65° viewing angle and a contrast ratio of 6:1

Key pad Full QWERTY keyboard with math symbols and function keys, soft keys, Power

Configuration Plug and play (no additional software required)

Batteries 4 × AAA alkaline

certification

compliance

Regulatory IC (Industry Canada), C-Tick, CE, FCC, NOM

Environmental EU WEEE, RoHS (Europe), US CPSIA, US Packaging

Warranty Two-year limited equipment warranty

Storage and operating specifications

Operating 41°F to 95°F (5°C to 35°C) **temperature**

Operating 5% to 85% relative humidity (non-condensing) humidity

Storage -40°F to 131°F (-40°C to 55°C) temperature

Storage humidity 5% to 90% relative humidity (non-condensing)

SMART order numbers

SRP-XE-24 Includes 1 receiver, 24 clickers, carrying case for 40 clickers, Phillips No. 1 screwdriver, 96

AAA batteries, quick start guide and software DVD

SRP-XE-32 Includes 1 receiver, 32 clickers, carrying case for 40 clickers, Phillips No. 1 screwdriver, 128

AAA batteries, quick start guide and software DVD

SRP-XE-40 Includes 1 receiver, 40 clickers, carrying case for 40 clickers, Phillips No. 1 screwdriver, 160

AAA batteries, quick start guide and software DVD

SPECIFICATIONS

SMART Response XE interactive response system – Receiver and clicker

Optional accessories


SRP-XE-RMT-1 Includes 1 clicker and 4 AAA batteries

SRP-XE-RMT-5 Includes 5 clickers and 20 AAA batteries

SRP-RCV-1 Includes a receiver and a software DVD

SRP-XE-CC Carrying case for 1 receiver and 40 clickers

Physical dimensions

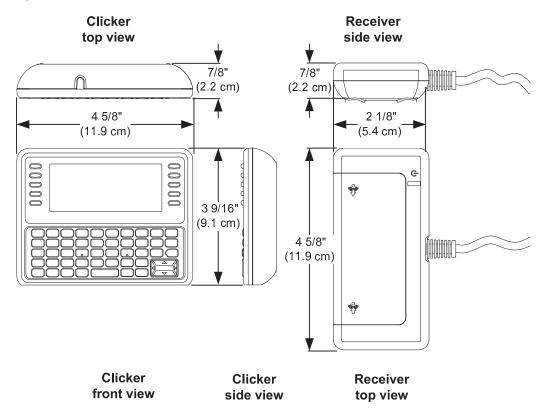

smarttech.com/support smarttech.com/contactsupport

© 2007–2013 SMART Technologies ULC. All rights reserved. SMART Response, SMART Notebook, SMART Ink, the SMART logo and smarttech are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. Microsoft, Windows, Internet Explorer, Visual Studio, ActiveX and DirectX are either registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Mac, Mac OS, OS X and Safari are trademarks of Apple Inc., registered in the U.S. and other countries. Adobe, Reader and Flash are either registered trademarks or trademarks of Adobe Systems Incorporated in the U.S. and/or other countries. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof covered by one or more of the following U.S. patents. www.smarttech.com/patents. Contents are subject to change without notice. 03/2013.